PURWIL HPC
CCS1 375

DC-HPC Technology

Our **charging cables and connectors** are the result of continuous research and development. By using high-quality materials and state-of-the-art production processes, they meet the highest standards in industry, automation, and E-mobility.
Rely on the **quality and reliability** of BRUGG eConnect.

BRUGG
eConnect
Cable solutions for a sustainable future

PURWIL HPC CCS1 375

Flexible and powerful: Our charging systems offer you unparalleled flexibility. With voltages up to 1 000 V and currents up to 375 A* they adapt to a wide range of requirements. Whether it's a fast-charging station on the highway or a charging hub for fleets, our solutions are scalable and future-proof.

Technical Data – DC

- Mode 4: CCS1 HPC
- Rated Voltage: 1 000 V DC
- Rated Current: 375 A*
- UL 2251:2022 - E533817
- UL 2263:2022 - E530622
- Aluminium Locking System
- Protection Class 3S
- Operating Temperature: -30 °C to +40 °C (-22 °F to +104 °F)**

Benefits for your charging station:

Fast Charging
Efficiently charge to maximize flexibility.

Highly Flexible and Functional Charging Cable
Setting new standards in terms of performance and durability. User-friendly handling due to the high flexibility of the cable and the ergonomic shape of the handle.

Customized Solutions
Individual cable lengths and assembly according to your needs.

Easy Maintenance
Quick replacement of wear parts.

Non-cooled Charging System
With the PURWIL HPC CCS1 375 charging system, no cooling is required.

Charging cable properties:

Rollover-resistant
- Wear-resistant
- Excellent oil and petrol resistance

Heat / Cold
- Temperature range: -40 °C to +90 °C (in case of short circuit +160 °C for 5 s)
- Resistant to temperature cycling

Sturdy
- Flame-retardant according to IEC 60332-1
- Resistant to hydrolysis, ozone and weathering
- UV radiation-resistant
- Halogen-free

Flexible
- Min. bending radius 10xD

Product Specifications

Description	Rated Current	Diameter	Cable Weight
PURWIL HPC CCS1 375	375 A*	40.50 +/- 0.4 mm (1.6 +/- 0.02 in)	3.12 kg/m (2.10 lb/ft)

* At 40 °C / 104 °F
** Higher ambient temperature possible with power derating (temperature limit of the DC contacts of 90 °C / 194 °F)

PURWIL HPC CCS1 375

Our advanced **fast-charging systems** represent a breakthrough in performance. Voltages up to **1000 V** and rated currents up to **375 A*** enable unparalleled charging power.

General Properties

Product Type	DC-HPC non-cooled charging cable with CCS1 connector
Product Family	PURWIL
Application	Electric vehicles (EV) charge with direct current (DC) installation
Installation	Charging stations for E-Mobility
Design	DC-charging cable with vehicle charging plug and open cable end
Equipment	Front face / Contacts / Locking bracket replaceable, analogue temperature sensors
Technology	Combined Charging System (CCS)
Logo	BRUGG eConnect
Charging Standard	CCS type 1
Charging Mode	Mode 4

Electrical Properties

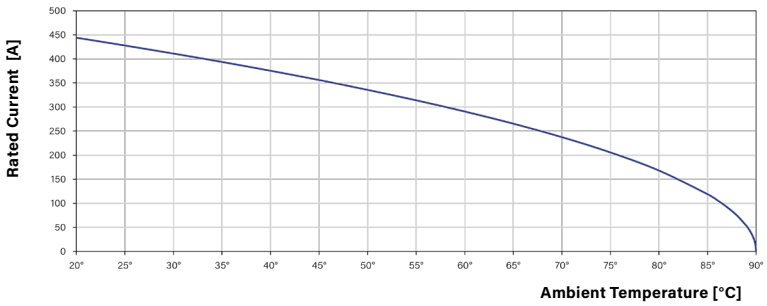

Coding	150 Ω (Lever not actuated), 480 Ω (Lever actuated)
Signal Contact	CP, PP
Temperature Monitoring	PT 1000 (2x): DC contacts
Max. Charging Power (at 40 °C / 104 °F)	375 kW
Rated Current (at 40 °C / 104 °F)	375 A

Power Contacts

Number	3 (PE, DC+, DC-)
Rated Voltage	1 000 V (DC)

Signal Contacts

Number	2 (CP, PP)
Rated Voltage	30 V (AC)
Rated Current	2 A

Temperature Sensors

Sensor Type	PT 1000 (analogue, EN 60751)
Switch-off Temperature	90 °C (194 °F)+/- 1K (PT 1000-value = 1347 Ω)
Ambient Temperature (Operation)	-50 °C to +130 °C (-58 °F to +266 °F)

Vehicle Charging Connector

Dimension Drawing
Unit: mm (in)

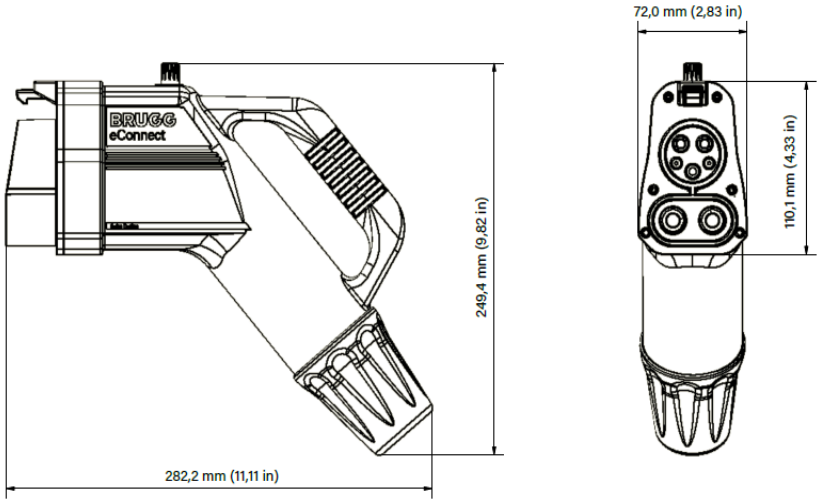

Width	72 mm (2.8 in)
Height	249.4 mm (9.8 in)
Depth	282.2 mm (11.1 in)

Material Specifications

Cable Colour	Black (RAL 9005)
Cable Outer Sheath	TPU (Polyurethane)
Locking Bracket	Aluminium
Vehicle Charging Connector	Plastic
Contacts Surface	Silver

Cable

Length	up to 10 m (32 ft 9.7 in) (on request)
Standard	UL 2263
Certification	UL - E530622 (USA and Canada)
Weight	3.12 kg/m (2.10 lb/ft)
Type	Class 6
Sort	Straight
Cross-section (AWG)	2x [2x1] + 1G1 + [8x 18C]
Diameter	40.50 +/- 0.4 mm (1.6 +/- 0.02 in)
Resistance	≤ 0.220 Ω/km (0.067 Ω/mft) (according to EN60228 for 2x1AWG)
Bending Radius (10xD)	Min. 405 mm (1 ft 3.9 in)

Mechanical Data

Insertion Cycles	> 10 000
Insertion Force	~ 100 N
Pulling Force	~ 100 N

Ambient Conditions

Protection Class (Vehicle-Charging plug)	3S
Temperature (Operation)	-30 °C to +40 °C (-22 °F to +104 °F)*
Temperature (Storage / Transport)	-40 °C to +80 °C (-40 °F to +176 °F)
Altitude	5 000 m a.s.l.

Standards

UL 2251:2022	UL certified E533817 (USA and Canada)
UL 2263:2022	UL certified E530622
Cable Length Restrictions	Length > 10 m (32 ft 9.7 in, interference-free V2G communication not guaranteed - ISO IEC 15118-3)

* Higher ambient temperature possible with power derating (temperature limit of the DC contacts of 90 °C / 194 °F)

BRUGG
eConnect

Cable solutions for a sustainable future

Satisfied customers are your success: With our products, you ensure high customer satisfaction and increase sales figures. Our comprehensive consulting and service support you in this endeavor.

Supplier
BRUGG eConnect AG
Industriestrasse 19
5200 Brugg
Switzerland

bruggeconnect.com

Contact us for a personalized offer.

scan or click

© BRUGG eConnect AG
Subject to change without notice
2026/003